



# midas

## MILEAGE

DOMESTIC DESIGNS 2019



## Grow with MIDAS MILEAGE...

Get the sales and profit growth you want in your retreading business by giving your customers MIDAS MILEAGE. Our high mileage compounds are designed to lower a fleet owners running cost by maximizing mileage per retread tyre.



Founded in 1969, MIDAS has grown to become Asia's largest supplier of Tyre Retreading Materials. We have focused on constantly improving compounds to provide customers with the best mileage.



## ISO 9001:2015, ISO 14001:2015


Our quality system is certified by VEXIL and UKAS, to ensure that we provide you with consistent materials, on time, every time.



# PRODUCTS

## Precured Treads

Made from high mileage compounds, our treads have been accepted the world over and tested on all road conditions.

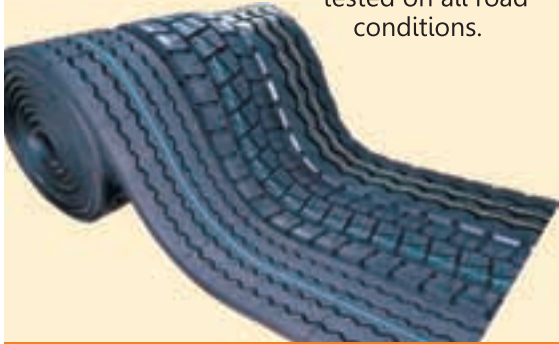

## Conventional (Hot) Rubber

Increased scorch safety to maximise shelf life. Different compounds available for different uses including (Truck, Tractor and OTR). Available in customer specified sizes.



## Bonding Gum

Our gum is made from 100% natural rubber to increase tack. Available in customer specified sizes also. Different types of Gum are available for both Precured and Hot process. Can be used to fill nail holes and repair injured parts of casing.

**FAST CURE**  
99°C

**Fast cure :**  
Special gum that can be used to reduce cure time. Please consult us before using.



125°C



**S P**  
125°C



## Black Vulcanising Solution

Available as **RTU (Ready to use)** and **ULTRA (Thin)** solution. Compatible with both precured and hot process.



## Rope Rubber

To be used in rubber extruder guns to repair rasping area. Provides excellent process safety and tack.



## Cushion Repair Compound (Hot process)

For industrial and agricultural use also. Can be used for submersible pumps.





# midas arcus




**UPTO  
DOUBLE  
TREAD LIFE  
AND  
SAVES AT LEAST  
8.5% FUEL**



While using **midas  arcus** Mr. Kaimul Haque Barbhuiya from Assam has reported double the mileage of a new tyre.


Mr. Kaimul Haque Barbhuiya from Assam has reported double the mileage of a new tyre.

## ALD

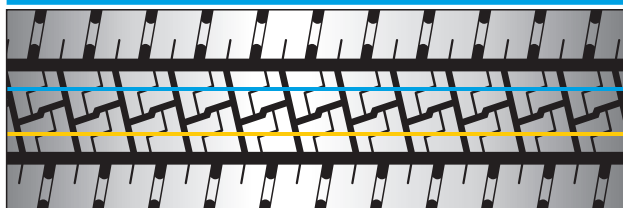


Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.5	3.5	12.300
10.00 R 20	128	220	13.5	3.5	11.500

## MVN

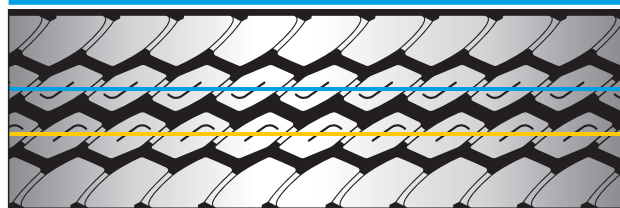


Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.5	3.8	12.100
10.00 R 20	128	220	13.5	3.8	11.400

## M 27

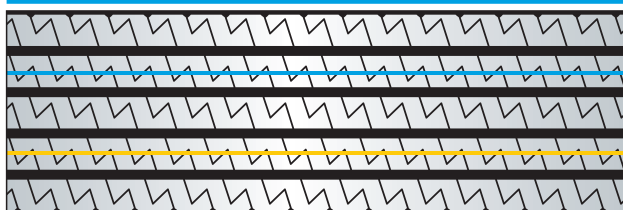

Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	220	13.5	3.0	12.000

## R 2

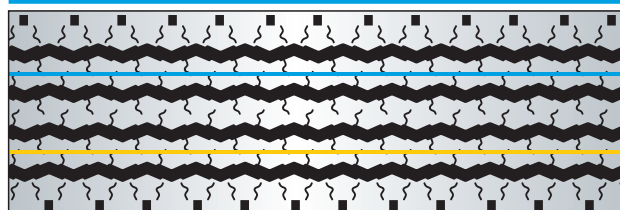

Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	220	15.0	4.0	13.000




## RIB DESIGNS

### AJAX



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	215	13.5	3.6	11.800
10.00 x 20 <b>Super</b>	128	210	16.5	4.0	13.800
10.00 x 20	127	208	13.5	3.6	11.500
10.00 x 20 <b>Super</b>	128	205	13.0	4.0	11.500
10.00 x 20	127	205	12.0	3.5	10.200
10.00 x 20	127	196	15.0	3.5	11.800
9.00 x 20 <b>L.W.</b>	124	194	12.0	3.0	9.400
9.00 x 20	124	190	14.5	3.5	10.900
9.00 x 20 <b>Super</b>	124	187	17.5	4.0	12.700
9.00 x 20	124	187	14.0	3.5	10.500
9.00 x 20 <b>Bus</b>	124	186	13.5	3.5	10.100
9.00 x 20 <b>L.W.</b>	124	186	11.0	3.0	8.300
<b>8.25 x 20</b>	<b>118</b>	<b>175</b>	<b>13.5</b>	<b>3.5</b>	<b>9.400</b>
8.25 x 20	118	168	13.5	3.5	8.800
8.25 x 20	118	165	12.5	3.0	8.100
8.25 x 20	116	165	12.5	3.0	7.900
8.25 x 20 <b>L.W.</b>	118	165	11.0	3.0	7.100
9.00 x 16	111	168	13.5	3.5	8.200
<b>8.25 x 16</b>	<b>103</b>	<b>175</b>	<b>13.5</b>	<b>3.5</b>	<b>8.100</b>
8.25 x 16	103	168	13.5	3.5	7.600
8.25 x 16	103	165	12.5	3.0	7.000
8.25 x 16 <b>L.W.</b>	103	165	11.0	3.0	6.100
7.50 x 16	99	156	13.0	3.5	6.400
7.50 x 16 <b>L.W.</b>	99	156	11.0	3.0	5.500
7.50 x 16	99	150	11.0	3.2	5.400
7.50 x 16 <b>L.W.</b>	99	150	10.0	3.0	5.000
F 78 x 15	87	156	13.0	3.5	5.700
7.00 x 15	93	150	11.0	3.2	5.100
7.00 x 15 <b>L.W.</b>	93	150	10.0	3.0	4.700
7.00 x 15	93	140	11.5	3.0	4.800
6.00 x 16	90	130	13.0	2.5	4.500
6.00 x 16	90	125	11.0	3.0	4.000
6.00 x 16	90	120	11.0	3.0	3.900
ACE	66	125	11.0	3.0	2.900
ACE	66	102	8.5	3.0	2.000
4.50 x 10	60	102	8.5	3.0	1.800
4.50 x 10	60	100	8.5	2.5	1.600

### ARIUS



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	220	14.5	3.5	13.000
10.00 x 20 <b>L.W.</b>	128	220	13.5	3.5	11.800
10.00 x 20	128	215	14.5	3.5	12.800
10.00 x 20 <b>Super</b>	128	208	18.0	4.0	15.500
10.00 x 20	127	208	14.5	3.5	12.000
9.00 x 20	124	190	17.0	4.0	12.900

### BUS MILER



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
9.00 x 20	127	188	18.0	4.0	13.700

### FLEET TRACK




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	215	13.0	3.5	11.200
8.25 x 16	103	174	12.5	3.5	7.200
7.50 x 16	99	160	14.0	3.0	6.500
7.00 x 15	93	150	13.5	3.0	5.500
Maruti / ACE	66	124	10.0	3.0	2.500

### KH




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	205	14.5	3.5	10.900


### LONG HAUL





Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
9.00 x 20 <b>Super</b>	124	185	18.0	4.0	13.200
9.00 x 20	124	185	14.5	3.5	10.700


## RIB DESIGNS


M 11					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	205	12.5	3.5	10.000


MERCURY					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	215	13.0	3.0	11.300
10.00 x 20	128	205	12.5	3.5	10.600
10.00 x 20 L.W.	127	205	11.0	3.0	9.300
9.00 x 20	124	194	13.5	3.5	10.500
9.00 x 20	124	190	16.0	4.0	11.800
9.00 x 20	124	187	13.5	3.5	10.200
8.25 x 20	118	176	12.0	3.5	8.200
8.25 x 20	118	170	11.0	3.0	7.200
8.25 x 16	103	176	12.0	3.5	7.200
8.25 x 16	103	170	11.0	3.0	6.200
7.50 x 16	99	160	11.0	3.5	6.000
ACE	66	123	10.0	3.0	2.600


M RIB					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	210	13.0	3.5	11.300
10.00 x 20	128	205	13.0	3.5	11.100
9.00 x 20	124	194	13.5	3.5	10.500
8.25 x 20	118	175	12.5	3.0	8.200
8.25 x 16	103	175	12.5	3.0	7.100
8.25 x 16	103	165	12.0	3.0	6.500
7.50 x 16	99	160	11.0	3.0	5.600
7.50 x 16	99	150	11.0	3.0	5.400
7.00 x 15	93	150	11.0	3.0	5.100
<b>ACE</b>	<b>132</b>	<b>124</b>	<b>10.0</b>	<b>3.0</b>	<b>5.200</b>
<b>ACE</b>	<b>66</b>	<b>124</b>	<b>10.0</b>	<b>3.0</b>	<b>2.600</b>
<b>4.50 x 10</b>	<b>120</b>	<b>104</b>	<b>10.0</b>	<b>2.5</b>	<b>3.800</b>
<b>4.50 x 10</b>	<b>60</b>	<b>104</b>	<b>10.0</b>	<b>2.5</b>	<b>1.900</b>

NH					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	204	14.0	4.0	11.700

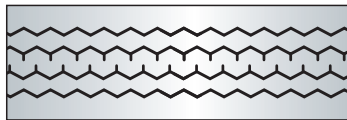OLYMPUS					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
8.25 x 20	118	168	13.5	3.0	8.100
8.25 x 16	103	168	13.5	3.0	7.100
7.00 x 15	93	150	10.0	3.0	4.600

ORION					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	205	13.5	3.0	10.900

PC 1					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	240	15.0	4.0	13.800
10.00 x 20	128	230	15.0	4.0	13.100
10.00 x 20	128	215	15.0	4.0	12.200

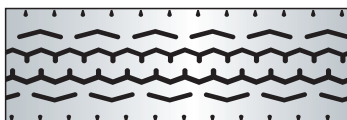PORT MILER					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 x 20	136	245	14.5	3.5	15.600
11.00 x 20	133	235	15.0	3.5	14.800
11.00 x 20	133	225	16.0	3.5	14.400
<b>11.00 x 20</b>	<b>133</b>	<b>220</b>	<b>15.0</b>	<b>3.5</b>	<b>13.600</b>
11.00 x 20	133	215	16.0	3.5	14.400
10.00 x 20	129	215	16.0	3.5	14.000
10.00 x 20	131	210	15.0	3.5	13.100
10.00 x 20	129	205	17.0	3.5	13.900
10.00 x 20 L.W.	129	205	16.0	4.0	13.500

## RIB DESIGNS

### REVER



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	205	13.5	3.5	11.500
9.00 x 20	124	194	13.0	3.5	10.500

### SONATA



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	210	13.0	3.5	11.400
10.00 x 20	127	205	12.0	3.0	9.600

### STARK



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
8.25 x 20	118	175	13.0	3.5	8.500
8.25 x 16	103	175	13.0	3.5	7.400
<b>7.50 x 16</b>	<b>99</b>	<b>165</b>	<b>12.5</b>	<b>3.5</b>	<b>6.500</b>

### SUPER VEE




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
9.00 x 20	124	190	13.5	3.5	9.800
9.00 x 20	124	186	13.5	3.5	9.600

### TRANSPORT



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	194	14.0	4.0	11.300
9.00 x 20	124	194	14.0	4.0	11.000
7.50 x 16 <b>Super</b>	99	148	13.0	3.7	6.400
7.50 x 16 <b>M.W.</b>	99	148	12.0	3.0	5.700
7.50 x 16 <b>L.W.</b>	99	148	11.0	3.5	5.300
7.00 x 15 <b>Super</b>	93	148	13.0	3.7	6.000
7.00 x 15 <b>M.W.</b>	93	148	12.0	3.0	5.400
7.00 x 15 <b>L.W.</b>	93	148	11.0	3.5	4.900

### VIKING



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	210	15.0	4.0	13.200
10.00 x 20 <b>Super</b>	128	205	15.0	3.6	12.600
10.00 x 20	127	205	12.0	3.0	10.100
10.00 x 20	127	200	14.5	4.0	12.300
10.00 x 20	127	197	14.5	4.0	12.300
10.00 x 20	127	195	11.0	3.2	9.300
10.00 x 20	127	194	13.5	3.0	10.800
10.00 x 20 <b>L.W.</b>	127	194	12.5	3.0	10.100
9.00 x 20	124	197	14.5	4.0	12.000
9.00 x 20	124	194	13.5	3.0	10.500
9.00 x 20 <b>L.W.</b>	124	194	12.5	3.0	9.800
9.00 x 20	124	186	13.0	3.5	10.000
9.00 x 20	123	180	13.0	3.0	9.300
8.25 x 20	118	180	13.0	3.0	8.900
8.25 x 20	118	172	13.5	3.5	9.000
8.25 x 16	104	172	13.5	3.5	7.900
7.50 x 16	99	158	12.5	3.5	6.600
7.50 x 16	99	150	11.5	3.0	5.400
F 78 x 15	87	158	12.5	3.5	5.800
F 78 x 15	87	150	11.5	3.0	4.700
7.00 x 15	93	150	11.5	3.0	5.100
7.00 x 15	93	140	12.0	3.0	5.000
6.00 x 16	90	130	10.0	3.0	3.900
6.00 x 16	90	120	10.0	3.0	3.700


### XL





Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	194	14.0	4.0	11.200
9.00 x 20	124	194	14.0	4.0	10.900
9.00 x 20	124	186	14.0	3.5	10.000



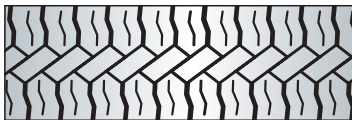

## LUG & SEMILUG DESIGNS


CROSS COUNTRY					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	215	15.0	3.5	12.100
10.00 x 20	127	210	15.0	3.5	11.900
10.00 x 20 <b>Super</b>	128	205	14.5	4.0	11.300
10.00 x 20	127	205	13.5	3.6	10.500


CROSS LUG					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	210	14.0	4.0	12.300
10.00 x 20	127	205	14.0	3.5	11.300
10.00 x 20	127	197	15.0	4.0	11.500
9.00 x 20	124	190	14.0	3.5	10.200
9.00 x 20	125	187	15.0	4.0	11.200
7.50 x 16	99	160	12.0	3.6	6.300


GRIP MASTER					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	240	14.0	3.5	13.000
10.00 x 20	127	205	14.0	4.0	11.300
7.50 x 16	99	158	13.0	3.5	6.100
7.50 x 16	99	148	13.0	3.5	5.600
7.00 x 15	93	148	13.0	3.5	5.300
6.00 x 16	90	124	12.0	3.6	3.900

ID MINES					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	130	230	19.0	4.0	15.300
10.00 x 20	130	225	18.0	4.0	14.300
10.00 x 20	127	205	16.0	4.0	12.000


L 01					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	215	14.0	4.0	12.000
10.00 x 20	127	205	14.0	4.0	11.200


LOG LUGGER					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 x 24	145.5	240	21.0	4.0	19.800
10.00 x 20	128	220	17.0	4.0	13.200
10.00 x 20	128	210	15.0	4.0	11.200


LUG MASTER					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	210	17.0	4.0	14.500
10.00 x 20 <b>L.W.</b>	128	210	13.5	3.5	11.700
10.00 x 20	127	208	13.5	3.5	11.000
10.00 x 20	128	207	16.0	4.0	13.700
10.00 x 20	127	205	14.0	4.0	11.600
9.00 x 20	124	190	17.0	4.0	12.500
9.00 x 20 <b>L.W.</b>	124	190	13.5	3.5	10.000
8.25 x 20	118	175	11.0	3.5	7.400
8.25 x 16	103	175	11.0	3.5	6.400
7.50 x 16	99	160	12.5	3.5	6.400


LZT					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	210	15.0	3.5	12.400
10.00 x 20	127	205	16.0	4.0	12.700


## LUG & SEMILUG DESIGNS


MBR					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	205	18.0	4.0	14.300

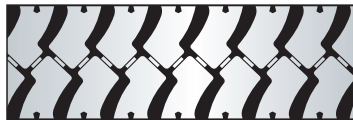
MC					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
11.00 x 20	130	220	15.5	3.5	13.100
10.00 x 20	128	207	15.5	3.5	12.000
9.00 x 20	124	190	15.0	3.5	10.600
9.00 x 16	111	190	15.0	3.5	9.400


MINES SPECIAL					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 x 24	147	240	15.0	4.0	17.000
10.00 x 20	128	225	15.0	4.0	13.900
10.00 x 20	128	220	15.0	4.0	13.600
10.00 x 20	128	215	16.0	4.0	13.000
10.00 x 20	127	205	14.0	3.5	10.700
9.00 x 20	124	190	14.0	3.5	9.900


MINES SUPER					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	205	14.0	3.5	11.100
9.00 x 20	124	190	15.0	3.5	10.500
8.25 x 20	118	175	13.5	3.5	8.600
8.25 x 20	118	168	13.5	3.5	8.200
9.00 x 16	111	190	15.0	3.5	9.300
8.25 x 16	103	175	13.5	3.5	7.700
8.25 x 16	103	168	13.5	3.5	7.200

MM					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	215	16.0	4.0	13.000
10.00 x 20	128	205	16.0	4.0	12.100

M TITAN					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 x 24	147	240	17.0	4.0	17.400
11.00 x 20	130	220	16.0	4.0	13.700
10.00 x 20	128	205	14.0	3.5	11.200

NMS					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
8.25 x 16	103	168	13.0	3.5	6.900
7.50 x 16	99	168	13.0	3.5	6.600

NTR					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 x 24	145.5	240	15.0	4.0	16.400

RM 1					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
8.25 x 20	118	175	14.5	3.5	9.000
8.25 x 16	103	175	14.5	3.5	7.900
7.50 x 16	99	160	13.0	3.5	6.400
7.50 x 16	99	150	13.0	3.0	5.600
7.00 x 15	93	150	13.0	3.0	5.300
7.00 x 15	93	140	11.5	3.0	4.500

## LUG & SEMILUG DESIGNS

## RM 6



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	129	205	17.0	4.0	12.300
9.00 x 20	125	195	17.0	4.0	11.000

# ROADSTER



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	127	210	16.0	4.0	12.500
10.00 x 20	128	205	17.0	3.7	12.600
10.00 x 20 <b>M.W.</b>	128	205	16.0	3.7	12.100
10.00 x 20 <b>L.W.</b>	127	205	14.0	4.0	11.200
10.00 x 20	127	196	16.0	3.8	11.800
9.00 x 20	124	196	16.0	3.8	11.500
9.00 x 20	124	195	14.0	4.0	10.500
9.00 x 20	124	186	15.5	3.0	10.100
9.00 x 20 <b>L.W.</b>	124	186	13.5	3.0	9.100
<b>8.25 x 20</b>	<b>118</b>	<b>172</b>	<b>14.0</b>	<b>3.5</b>	<b>8.500</b>
9.00 x 16 <b>L.W.</b>	111	186	13.5	3.0	8.200
<b>8.25 x 16</b>	<b>103</b>	<b>172</b>	<b>14.0</b>	<b>3.5</b>	<b>7.400</b>
8.25 x 16	103	165	12.5	3.0	6.300
7.50 x 16	99	160	12.0	3.0	5.800
7.00 x 15	93	150	11.5	3.0	5.000

## SLM



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 x 20	128	210	13.0	3.5	11.000
10.00 x 20	128	205	14.0	3.5	11.300
8.25 x 20	118	175	13.0	4.0	8.300
8.25 x 16	103	175	13.0	4.0	7.300
7.50 x 16	99	160	12.0	3.5	6.000
7.50 x 16	99	150	11.0	3.0	5.200
7.00 x 15	93	150	11.0	3.0	4.900
<b>165 D 13*</b>	<b>77</b>	<b>135</b>	<b>9.0</b>	<b>3.0</b>	<b>3.100</b>
ACE	66	120	10.0	3.0	2.500

## SEMI LUG



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
11.00 x 20 <b>Super</b>	133	215	16.0	3.5	13.700
10.00 x 20	128	215	14.0	3.5	12.300
10.00 x 20	127	210	15.0	3.5	12.000
10.00 x 20	128	208	17.0	4.0	13.400
10.00 x 20	128	205	13.0	4.0	11.300
10.00 x 20 <b>L.W.</b>	127	205	12.5	3.5	10.400
10.00 x 20	127	197	14.0	4.0	11.100
9.00 x 20	124	197	14.0	4.0	10.800
9.00 x 20 <b>Super</b>	125	187	18.0	4.0	12.000
9.00 x 20	125	187	14.5	4.0	10.200
9.00 x 20 <b>M.W.</b>	124	187	13.5	3.0	9.200
<b>8.25 x 20</b>	<b>118</b>	<b>175</b>	<b>14.5</b>	<b>3.5</b>	<b>9.300</b>
8.25 x 20	118	168	14.5	4.0	9.200
8.25 x 20	118	165	11.5	3.0	7.100
9.00 x 16 <b>M.W.</b>	111	187	13.5	3.0	8.100
<b>8.25 x 16</b>	<b>103</b>	<b>175</b>	<b>14.5</b>	<b>3.5</b>	<b>8.000</b>
8.25 x 16	103	168	14.5	4.0	8.000
8.25 x 16	103	165	11.5	3.0	6.200
7.50 x 16	99	160	14.0	4.0	7.100
7.50 x 16 <b>L.W.</b>	99	160	11.0	4.0	6.000
7.50 x 16	99	155	11.5	3.0	5.500
7.50 x 16	99	150	13.0	4.0	6.200
7.50 x 16 <b>L.W.</b>	99	150	11.0	3.0	5.000
6.00 x 16	90	132	12.5	3.0	4.600
6.00 x 16	90	124	13.0	3.0	4.400



## LUG & SEMILUG DESIGNS

# TRACK MASTER


[illegible]

## LCV & CAR DESIGNS

# APOLLO



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
7.00 x 15	93	145	11.0	3.0	4.600
DOST (185 R 14)	82	145	11.0	3.0	4.200

**ASTRO**


Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Car	87	176	12.0	3.0	5.800
F 78 x 15	87	165	10.0	3.5	4.500
F 78 x 15	87	156	12.0	3.0	5.000
F 78 x 15 <b>L.W.</b>	87	156	9.5	2.5	4.100
7.50 x 16	99	150	12.5	3.0	5.500
7.00 x 15 <b>L.W.</b>	93	150	9.5	2.5	3.800
Spacio	90	138	10.0	3.0	4.000
6.00 x 16	90	120	10.5	2.0	3.200
Car	82	138	10.0	3.0	3.700
ACE	66	125	11.0	2.5	2.800
ACE	66	120	10.5	2.0	2.300

# AUTO




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
4.00 x 8	50	84	8.0	2.6	1.100


# EAGLE




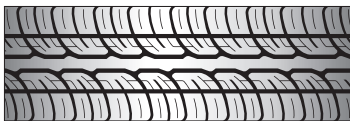
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
6.00 x 16	90	145	9.0	3.5	3.800
Fiat	76	135	9.0	3.0	2.900
Maruti	66	125	9.0	3.0	2.200


# LCV & CAR DESIGNS

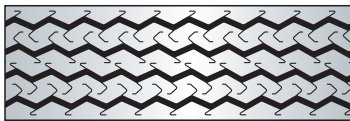
CAR M					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Ambassador	82	118	11.0	3.0	3.500
Amb: Taxi	82	114	12.0	3.0	3.500
Ambassador	82	114	9.7	2.6	3.000
Ambassador	82	107	12.0	3.0	3.300
ACE	66	118	11.0	3.0	2.800
Maruti	66	107	12.0	3.0	2.700
Maruti	66	102	10.0	2.0	2.100
Maruti	66	95	8.5	2.5	1.700
Maruti	66	91	8.0	2.0	1.500
4.50 x 10 <b>Super</b>	60	102	12.0	2.5	2.100
4.50 x 10	60	102	10.0	2.0	1.800
4.50 x 10	60	95	8.5	2.5	1.600
4.00 x 8	50	88	10.0	2.0	1.400
4.00 x 8	50	85	9.0	2.0	1.100


IRR					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
CAR	87	190	8.5	3.0	4.600


JEEP					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
6.00 x 16	90	132	11.0	3.5	4.100
6.00 x 16	90	123	12.0	3.0	3.900

M 35					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Car	93	180	10.0	4.0	5.200
Car	87	170	10.0	4.0	4.800

MHW					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
7.00 x 15	93	148	11.5	3.3	5.100
7.00 x 15	93	138	11.5	3.3	4.800

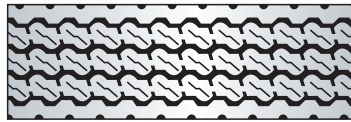MTR					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
7.50 x 16	99	152	10.0	3.0	5.200
7.00 x 15	93	152	10.0	3.0	4.700
7.00 x 15	93	140	10.0	3.0	4.100
Maruti / ACE	66	125	10.0	3.0	2.500
4.50 x 10	60	105	10.0	3.0	1.900

NEW TRACTOR FRONT					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
7.50 x 16	99	160	14.0	4.0	5.900
6.00 x 16	90	132	13.5	3.5	4.100
6.00 x 16	90	124	15.0	4.0	3.500

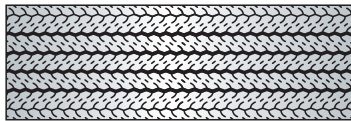OPTIMA					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
6.00 x 16	90	120	8.0	2.5	3.000
6.00 x 16	90	115	10.0	2.5	3.300
Ambassador	82	120	8.0	2.5	2.700
Ambassador	82	115	10.0	2.5	3.000
ACE	66	120	8.0	2.5	2.200
ACE	66	115	10.0	2.5	2.400
ACE <b>L.W.</b>	66	95	8.0	2.5	1.700
Maruti <b>L.W.</b>	66	104	8.0	2.5	1.900
4.50 x 10 <b>L.W.</b>	60	95	8.0	2.5	1.500
4.00 x 8	50	85	9.0	2.5	1.100

## LCV & CAR DESIGNS

### PCM



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
MARUTI	66	125	7.0	2.5	1.800

### PE



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
MARUTI	66	100	8.0	3.0	1.800
4.50 x 10	60	100	8.0	3.0	1.600

### PICKUP



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
7.00 x 15	93	145	11.0	3.0	4.400

### PZ



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
MARUTI	66	125	8.0	2.5	2.100

### RADIAL



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Tata Estate	87	174	12.0	3.0	5.200
Ambassador	82	138	10.0	2.5	3.400
Maruti	66	128	10.0	2.5	2.500

### R 3



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
F 78 x 15	87	170	8.0	3.5	3.600
7.00 x 15	93	140	9.0	2.5	3.100

### R 4



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Car	93	185	10.0	3.0	5.300
<b>Car*</b>	<b>87</b>	<b>173</b>	<b>11.0</b>	<b>3.0</b>	<b>5.000</b>
Car	93	165	10.0	2.5	4.300
Car	90	165	10.0	2.5	4.200
Car	87	165	10.0	2.5	4.100
Car	90	145	10.0	3.0	3.800
Car	66	115	10.0	2.5	2.200
Car	60	102	10.0	2.5	2.000

### SRM



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
7.00 x 15	93	145	10.5	3.0	4.600
7.00 x 15	93	140	9.0	3.0	4.000

### TRACTOR FRONT





Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
6.00 x 16	90	136	14.0	4.0	3.600
6.00 x 16	90	130	12.0	3.5	3.700


\* Coming soon




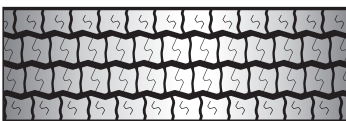
## RADIAL DESIGNS


ADH					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	14.0	3.5	12.200
10.00 R 20	128	220	14.0	3.3	11.500
10.00 R 20	128	215	14.0	3.3	11.200
10.00 R 20	128	210	13.5	3.8	11.200
9.00 R 20	127	190	14.5	3.5	10.300
9.00 R 20	124	190	14.5	3.5	10.100
8.25 R 20	118	190	14.5	3.5	9.600
8.25 R 20 <b>Super</b>	121	180	16.0	3.5	10.400
8.25 R 20	118	180	12.0	3.5	8.000


ALD					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	13.0	3.3	12.500
<b>10.00 R 20 <b>Super</b></b>	<b>128</b>	<b>230</b>	<b>16.0</b>	<b>4.0</b>	<b>14.400</b>
10.00 R 20	128	230	13.5	3.5	12.400
10.00 R 20 <b>Super</b>	128	220	16.0	4.0	14.000
10.00 R 20	128	220	13.5	3.5	11.700
10.00 R 20	128	215	13.5	3.5	11.500
10.00 R 20	128	210	13.0	3.5	11.100
<b>8.25 R 20</b>	<b>118</b>	<b>175</b>	<b>12.0</b>	<b>3.0</b>	<b>7.700</b>
<b>8.25 R 16</b>	<b>103</b>	<b>175</b>	<b>12.0</b>	<b>3.0</b>	<b>6.700</b>

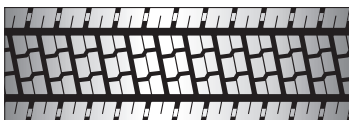AMD					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	14.0	3.5	12.000
10.00 R 20	128	220	14.0	3.5	11.200

BCRDL					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	15.0	4.0	14.000
10.00 R 20	128	215	15.0	4.0	13.100
10.00 R 20	127	212	10.0	3.0	8.900
9.00 R 20	124	190	11.0	3.5	8.700

BDE					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	17.5	4.0	16.000
10.00 R 20	128	220	17.5	3.5	15.100

D 167 E					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	219	15.0	3.0	11.500
10.00 R 20	128	203	15.0	3.0	10.000

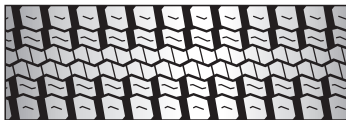D 167 P					
					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	17.0	3.5	12.700

## RADIAL DESIGNS

EH					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	210	16.0	3.5	12.000

H 27					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	203	13.5	3.5	10.800
9.00 R 20	124	194	13.5	3.5	10.200

H 85					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	203	12.5	3.5	10.100

M 3					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	19.0	3.5	16.000


M 4					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	260	18.0	3.5	15.100
295/80 R 22.5	128	250	18.0	3.5	14.800
295/80 R 22.5	128	240	18.0	3.5	14.400
10.00 R 20	128	230	18.0	3.5	14.000


M 5					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	320	14.5	4.0	18.900
295/80 R 22.5	128	250	14.5	3.5	12.900
295/80 R 22.5	128	240	14.5	3.5	11.700
10.00 R 20	128	230	14.5	3.5	11.500
10.00 R 20	128	220	16.5	3.5	12.700
10.00 R 20	128	215	16.5	3.5	12.300
10.00 R 20 L.W.	128	220	14.0	3.5	11.200
10.00 R 20 L.W.	128	215	14.0	3.5	10.900


M 6					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	15.0	3.5	13.000
10.00 R 20	128	215	15.0	3.5	12.200


M 8					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 R 24	147	260	19.0	3.3	18.200
12.00 R 24	147	250	19.0	3.3	17.500
12.00 R 24	147	240	19.0	3.3	16.800
9.00 R 20	124	190	15.0	3.0	9.000
8.25 R 20	118	180	14.0	3.3	7.700
8.25 R 16	103	170	13.0	3.3	6.100
7.50 R 16	99	160	14.0	2.5	5.700
7.50 R 16	99	150	14.5	3.0	5.400
7.00 R 15	93	150	14.5	3.0	5.100
7.00 R 15	93	140	13.0	2.5	4.200


## RADIAL DESIGNS


<div>M 10</div> <div>Directional Pattern</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 R 20	134	280	21.0	4.0	21.000
12.00 R 20	134	270	20.0	4.0	20.000
315/80 R 22.5	128	260	20.0	4.0	18.300
295/80 R 22.5	128	250	20.0	4.0	18.100
295/80 R 22.5	128	240	20.0	4.0	16.600
10.00 R 20	128	230	20.0	4.0	16.300
10.00 R 20	128	230	19.0	3.5	14.400
10.00 R 20	128	220	20.0	4.0	15.500
10.00 R 20	128	220	15.0	3.5	11.700
10.00 R 20	128	210	15.0	3.5	10.800


<div>M 14</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	210	13.0	3.5	9.800
10.00 R 20	127	200	13.0	3.5	8.700
9.00 R 20	124	190	13.0	3.5	8.400
9.00 R 20	124	180	13.0	3.5	8.300
8.25 R 20	118	180	13.0	3.5	7.900
8.25 R 20	118	170	13.0	3.5	7.200
8.25 R 16	103	170	13.0	3.5	6.400

<div>M 16</div> <div>Directional Pattern</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	260	18.0	3.5	17.600
295/80 R 22.5	128	250	18.0	3.5	16.200
295/80 R 22.5	128	240	18.0	3.5	15.700
10.00 R 20	130	230	20.0	4.0	16.200
295/80R22.5 L.W.	128	240	14.0	3.5	12.700
10.00 R 20 L.W.	128	230	14.0	3.5	12.200
10.00 R 20 L.W.	130	220	14.0	3.5	11.700

<div>M 22</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	16.5	3.5	12.700
10.00 R 20	128	220	16.5	3.5	12.300
10.00 R 20	128	215	16.5	3.5	12.200
10.00 R 20	128	204	16.5	3.5	11.600

<div>M 23</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	220	13.0	3.3	11.500
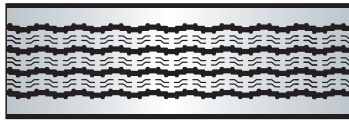
<div>M 24</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.0	3.0	11.800
10.00 R 20	128	220	13.0	3.0	11.000
10.00 R 20 L.W.	128	220	12.0	3.5	10.200
10.00 R 20	128	215	13.0	3.5	11.000
10.00 R 20 L.W.	128	215	12.0	3.5	9.800
10.00 R 20	128	203	12.0	3.0	9.500
<b>TATA ULTRA</b>					
235/75 R 17.5	98	203	12.0	3.0	7.100
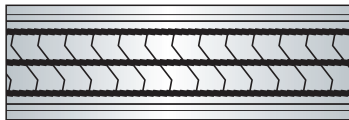
<div>M 25</div> 					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.0	3.5	12.000
10.00 R 20	128	220	13.0	3.5	11.500




## RADIAL DESIGNS

RADIAL DESIGNS


midas

### M 26




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 R 24	147	275	18.0	3.5	20.400
12.00 R 24	147	265	18.0	3.5	19.300
295/80 R 22.5	128	250	18.0	3.5	15.800
295/80 R 22.5	128	240	18.0	3.5	15.500
10.00 R 20	128	220	14.5	3.5	12.000
10.00 R 20 L.W.	128	220	13.5	3.5	11.400

### M 31



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	12.0	3.5	12.000
10.00 R 20	128	225	13.0	3.5	11.900
8.25 R 20	118	185	12.0	3.5	8.300
<b>8.25 R 20</b>	<b>118</b>	<b>175</b>	<b>11.5</b>	<b>3.5</b>	<b>7.500</b>
<b>8.25 R 16</b>	<b>103</b>	<b>175</b>	<b>11.5</b>	<b>3.5</b>	<b>6.600</b>

### M 27




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	12.5	3.0	12.700
10.00 R 20	128	225	13.5	3.0	12.600
10.00 R 20	128	220	13.5	3.0	12.200
10.00 R 20	128	215	13.5	3.0	11.900

### M 32



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	260	18.0	4.0	17.700
295/80 R 22.5	128	250	18.0	4.0	17.000
295/80 R 22.5	128	240	18.0	4.0	16.600
10.00 R 20	128	230	18.0	4.0	14.800

### M 28




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.0	3.5	11.600
10.00 R 20	128	220	13.0	3.5	11.100

### M 33




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	17.0	4.0	15.000
10.00 R 20	128	220	17.0	4.0	14.500

### M 30



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	13.0	3.0	13.000
10.00 R 20	128	230	14.0	3.0	12.600
10.00 R 20	128	225	13.0	3.0	12.000
10.00 R 20	128	220	13.0	3.0	11.700
10.00 R 20	128	215	13.0	3.0	11.500

### M 34



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	14.0	3.5	13.300
10.00 R 20	128	230	13.5	3.5	12.500
10.00 R 20	128	225	14.0	3.5	12.300
10.00 R 20	128	215	14.0	3.5	12.000

## RADIAL DESIGNS

MAXIMUS					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	265	16.0	4.0	16.100
315/80 R 22.5	128	260	14.0	4.0	14.400
295/80 R 22.5	128	250	16.0	4.0	14.500
295/80 R 22.5	128	240	16.0	4.0	14.500
10.00 R 20	128	235	19.0	4.0	15.700
10.00 R 20	128	235	15.0	4.0	13.000
10.00 R 20	128	230	16.0	4.0	13.800
10.00 R 20	128	225	16.0	4.0	13.200
10.00 R 20	128	220	16.0	4.0	12.800
10.00 R 20 L.W.	128	250	14.0	3.5	13.600
10.00 R 20 L.W.	128	240	14.0	3.5	12.800
10.00 R 20 L.W.	128	235	14.0	3.5	12.000
10.00 R 20 L.W.	128	230	14.0	3.5	11.900
10.00 R 20 L.W.	128	225	14.0	3.5	11.700
10.00 R 20 L.W.	128	220	14.0	3.5	11.600
10.00 R 20	128	215	15.0	3.5	12.100
10.00 R 20 L.W.	128	215	14.0	3.5	11.000
10.00 R 20 Super	128	210	16.5	3.5	12.600
10.00 R 20	128	210	15.0	3.5	11.600
10.00 R 20	127	205	13.5	3.5	10.100
9.00 R 20	124	194	13.5	3.5	10.000
9.00 R 20	124	190	16.0	4.0	10.800
9.00 R 20	124	187	13.5	3.5	9.500
8.25 R 20	118	180	14.0	3.5	8.800
9.00 R 16	111	194	13.5	3.5	8.900
9.00 R 16	111	187	13.5	3.5	8.500
7.50 R 16	99	160	11.0	3.5	5.800
7.50 R 16	99	150	11.0	3.0	5.100
7.00 R 15	93	150	11.0	3.0	4.800

MCH					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	250	15.0	3.5	16.000
295/80 R 22.5	128	240	15.0	3.5	15.000
10.00 R 20	128	230	15.0	3.5	14.700


MDH					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.0	3.0	12.000
10.00 R 20	128	215	13.0	4.0	12.000
10.00 R 20	128	210	13.0	4.0	11.500

MML Directional Pattern					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	270	18.0	4.0	17.900
315/80 R 22.5	128	260	18.0	4.0	17.300
295/80 R 22.5	128	250	18.0	4.0	17.000
295/80 R 22.5	128	240	18.0	4.0	16.000
10.00 R 20	128	230	18.0	4.0	14.800
10.00 R 20	128	220	17.0	4.0	13.700
295/80R22.5 L.W.	128	250	14.0	3.5	12.800
295/80R22.5 L.W.	128	240	14.0	3.5	12.500
10.00 R 20 L.W.	128	230	14.0	3.5	11.900
10.00 R 20	128	215	14.0	3.5	11.200
10.00 R 20	128	210	14.0	3.5	11.000
4.50 x 10	60	100	8.5	2.5	1.400

MREC					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	265	14.5	3.5	14.800
295/80 R 22.5	128	250	14.5	3.5	14.000
295/80 R 22.5	128	240	14.5	3.5	13.400
10.00 R 20	128	230	14.5	3.5	12.800
10.00 R 20	128	220	14.5	3.5	12.200

## RADIAL DESIGNS

### MRK



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	210	14.0	3.5	11.600
10.00 R 20 <b>L.W.</b>	128	210	12.5	3.5	10.800
10.00 R 20	128	205	12.0	3.0	10.000
<b>TATA ULTRA</b>					
235/75 R 17.5 <b>L.W.</b>	98	210	12.5	3.5	8.200
235/75 R 17.5	98	205	12.0	3.0	7.700

### MVI




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	250	18.0	3.5	15.500
295/80 R 22.5	128	240	18.0	3.5	14.200
10.00 R 20	128	210	13.5	3.5	10.400

### MVN




Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	230	13.5	3.8	12.000
10.00 R 20 <b>Super</b>	128	220	13.5	3.8	11.500
10.00 R 20	128	220	13.0	3.8	11.000
10.00 R 20	128	215	14.0	3.5	11.700

### R 5



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	128	215	13.0	4.0	11.700
10.00 R 20 <b>L.W.</b>	128	215	13.0	3.0	11.300

### R 2



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	128	255	14.5	4.0	15.000
295/80 R 22.5	128	250	17.0	4.0	16.300
295/80 R 22.5	128	250	14.0	4.0	14.200
295/80 R 22.5	128	245	14.0	3.5	14.100
295/80 R 22.5	128	240	14.0	3.5	13.200
10.00 R 20	128	235	14.5	3.5	12.700
10.00 R 20	128	230	14.5	3.5	13.100
10.00 R 20	128	225	15.0	4.0	12.800
10.00 R 20	128	220	15.0	4.0	13.200
10.00 R 20	128	215	14.5	3.5	12.200
10.00 R 20	128	210	15.0	4.0	11.900
10.00 R 20	127	200	15.0	3.5	11.500
10.00 R 20	127	195	15.0	3.5	11.200
9.00 R 20	124	195	15.0	3.5	10.900
9.00 R 20	124	190	15.0	4.0	10.000
9.00 R 20	124	185	13.5	3.5	9.800
8.25 R 20	118	175	12.0	3.3	7.700
8.25 R 16	103	175	12.0	3.3	6.700
7.50 R 16	99	160	13.0	2.5	5.700
7.50 R 16	99	158	11.5	3.0	5.500
7.50 R 16	99	148	11.5	3.0	5.000
7.00 R 15	93	148	11.5	3.0	4.700
7.00 R 15	93	148	11.0	2.5	4.300

### RM 13



Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	240	18.0	3.0	14.800
10.00 R 20	128	230	18.0	3.5	14.100
10.00 R 20	128	220	18.0	3.5	13.500
10.00 R 20	128	210	18.0	3.0	12.000

## RADIAL DESIGNS


RM 16					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	133	240	18.0	3.0	17.200
295/80 R 22.5	129	240	18.0	3.0	16.700



RM 17					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	133	240	16.0	4.0	15.300
295/80 R 22.5	129	240	16.0	4.0	14.800



RM 30					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	130	265	16.5	3.5	16.700
295/80 R 22.5	135	250	16.5	3.5	15.700
295/80R22.5 L.W.	128	250	14.0	3.5	13.500
295/80 R 22.5	133	240	16.5	3.5	15.400
10.00 R 20	130	230	17.0	3.5	15.200
10.00 R 20	130	220	16.5	3.5	13.800
<b>10.00 R 20</b>	<b>128</b>	<b>215</b>	<b>13.5</b>	<b>3.5</b>	<b>11.400</b>
<b>10.00 R 20</b>	<b>128</b>	<b>210</b>	<b>13.5</b>	<b>3.5</b>	<b>11.200</b>



RM 31					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	130	270	20.0	4.0	19.700
315/80 R 22.5	130	260	20.0	4.0	18.800
295/80 R 22.5	135	250	20.0	4.0	19.000
295/80 R 22.5	133	240	20.0	4.0	18.300
10.00 R 20	130	220	20.0	4.0	16.100
<b>295/80 R 22.5 L.W.</b>	<b>135</b>	<b>250</b>	<b>16.0</b>	<b>4.0</b>	<b>16.000</b>
<b>295/80 R 22.5 L.W.</b>	<b>133</b>	<b>240</b>	<b>16.0</b>	<b>4.0</b>	<b>15.000</b>



XZYP					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
10.00 R 20	127	219	14.0	3.5	12.000
10.00 R 20	127	203	14.0	3.5	10.600
9.00 R 20	124	194	14.0	3.5	10.000



Z LUG					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
295/80 R 22.5	128	250	14.5	3.5	13.500
295/80 R 22.5	128	240	16.0	4.0	14.000
10.00 R 20	128	235	14.0	3.5	12.100
10.00 R 20	128	230	14.0	3.5	11.900
10.00 R 20	128	225	16.0	4.0	13.200
10.00 R 20	128	220	16.0	4.0	13.000
10.00 R 20 L.W.	128	220	15.5	4.0	11.800
10.00 R 20	128	215	16.0	4.0	13.000
10.00 R 20	127	210	16.0	4.0	12.100
10.00 R 20	127	205	14.0	3.0	10.600
9.00 R 20	124	195	15.0	4.0	11.100
9.00 R 20 M.W.	124	195	14.0	3.5	10.300
9.00 R 20	124	190	15.0	3.5	10.400
8.25 R 20	118	177	13.0	3.5	8.400
9.00 x 16	111	190	15.0	3.5	9.300
8.25 R 16	103	177	13.0	3.5	7.300
7.50 R 16	99	160	13.0	3.0	6.000
6.00 x 16	90	124	12.0	3.0	3.800
ACE	66	124	12.0	3.0	2.700



JCB					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
14.00 x 25	166	315	27.0	5.5	39.800
12.5/80-18 (JCB Front)	114	285	16.0	4.0	14.700





## SPECIAL APPLICATIONS

DB TREAD				
Name	Length (inch)	Base width (mm)	Total thickness (mm)	Approx. weight (kgs)
Spl. Application	413	305	12.6	49.500
Spl. Application	128	295	19.0	20.500
Spl. Application	134	240	23.0	19.600
Spl. Application	122	230	16.0	13.800
Spl. Application	134	220	19.0	16.000
Spl. Application	129	205	22.0	16.400
Spl. Application	130	205	20.0	16.000
Spl. Application	100	200	14.0	7.700
Spl. Application	127	190	19.0	13.000
Spl. Application	126	175	16.0	10.500
Spl. Application	94	140	14.0	5.500

GPZH					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
12.00 x 24	413	270	32.0	4.0	87.000
12.00 x 24	145.5	260	19.0	4.0	20.100
12.00 x 24	413	250	22.0	4.0	62.600
12.00 x 24 L.W.	145.5	250	19.0	4.0	19.700
12.00 x 24 Super	145.5	240	24.0	4.5	22.800
12.00 x 24 M.W.	133	240	21.0	4.0	17.000
12.00 x 24 L.W.	145.5	240	19.0	3.5	18.500
12.00 x 24	413	232	22.0	4.0	58.500
12.00 x 24	133	230	21.0	4.0	16.200
12.00 x 24	145.5	225	20.00	4.0	18.200
10.00 x 20	130	215	19.0	4.0	14.500

GRML					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Spl. Application	152	320	20.0	4.0	23.800
Spl. Application	152	300	18.0	4.0	21.200
Spl. Application	152	290	18.0	4.0	20.800

GRTDL					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
Spl. Application	413	240	17.0	4.0	43.000
Spl. Application	413	230	17.0	4.0	41.000
Spl. Application	413	220	17.0	4.0	39.800

## RADIAL SPECIAL

M 9					
Name	Length (inch)	Base width (mm)	Tread depth (mm)	Base thickness (mm)	Approx. weight (kgs)
315/80 R 22.5	129	270	13.0	3.5	14.200
315/80 R 22.5	129	260	13.0	3.5	13.900
295/80 R 22.5	129	250	13.0	3.5	13.200
295/80 R 22.5	129	240	13.0	3.5	12.600
10.00 R 20	129	230	13.0	3.3	11.500
10.00 R 20	129	220	13.0	3.0	11.000
10.00 R 20	129	215	13.0	3.0	10.900

- Over 1 lakh kilometers on good roads
- Use only for RADIAL tyres

## HALF SKIRT ENVELOPES - STEAM BONDER



Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 28	14.00 x 25, 14.00 x 24
2	46 x 28	12.00 x 24, 12.00 R 24
3	44 x 28	12.00 x 20, 12.00 R 20
4	44 x 22	11.00 R 24, 315/80 R 22.5, 385/65 R 22.5
5	42 x 26	11.00 x 20, 10.00 x 20, 10.00 R 20, 295/80 R 22.5, 11.00 R 22.5
6	40 x 25	9.00 x 20, 9.00 R 20
7	38 x 25	8.25 x 20
8	35 x 20	7.50 x 20, 9.00 x 16
9	31 x 17	8.25 x 16, 6.50 x 20
10	31 x 18	7.50 x 16, 7.00 x 16, F78 x 15, 235/75 R 17.5
11	29 x 19	6.00 x 16, 7.00 x 15, 6.70 x 15, 195/70 R 15, 195/215 R 14, 185/85 R 16, 235 R 16
12	26 x 17	5.90 x 15, 165/195/205/215/235/70 R 15
13	25 x 16	5.20 x 14, 6.70 x 14, 155 R 13, 175 R 13, 6.40x13, 155/175/185/195/215/70 R 14, 165 D 14
14	21 x 12	4.50/5.65 x 12, 145 R 12, 145 R 13, 155/80 D 12, 165/80 D 12, 165/65 R 13
15	19 x 11	4.50 x 10
16	17 x 08	4.00 x 8

## FULL SKIRT ENVELOPES - ELECTRIC CHAMBER



ENVELOPES

midas

Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 21	14.00 x 25, 14.00 x 24
2	46 x 22	12.00 x 24, 12.00 R 24
3	44 x 19	11.00 R 24, 12.00 x 20
4	44 x 17	13.00 R 22.5, 385/65 R 22.5, 12.00 R 20
5	43 x 20	12.00 R 22.5, 315/80 R 22.5
6	42 x 17	11.00 x 20
7	42 x 19* GREEN	10.00 x 20, 10.00 R 20, 315/70 R 22.5, 295/80 R 22.5, 11.00 R 22.5
8	42 x 19	10.00 x 20, 10.00 R 20, 315/70 R 22.5, 295/80 R 22.5, 11.00 R 22.5
9	40 x 17	9.00 x 20, 9.00 R 20, 275/80 R 22.5, 10.00 R 22.5
10	38 x 20	8.25 x 20
11	35 x 13	9.00 x 16
12	35 x 16* GREEN	7.50 x 20, 8.25 x 16
13	35 x 16	7.50 x 20, 8.25 x 16
14	32 x 16	7.50 x 16, 7.00 x 16, 235/75 R 17.5
15	31 x 14	7.00 x 15
16	28 x 16	6.00 x 16, F78 x 15, 195 R 15, 195/215 R 14, 215 R 15, 185/85 R 16, 235 R 16
17	26 x 16	5.90 x 15, 165 R 15, 5.20 x 14, 6.00 x 14, 165 R 14, 165 D 14
18	22 x 11	155/80 D 12, 165/80 D 12, 165/65 D 13, 145 R 13, 4.50 x 12, 5.65 x 12, 145 R 12
19	19 x 09	4.50 x 10
20	17 x 08	4.00 x 8

\* Gives double the life

## DOUBLE ENVELOPE SYSTEM

The double envelope system can be used only with radial tyres. When this system is used no rim, curing bag or flap is required. This makes the work easier.

As vacuum and chamber pressure act evenly on all areas of the tyre the retreading process is better.

In the rim and curing bag system heat penetration is from outside whereas in the Double Envelope System heat penetrates from both sides. Hence curing time can be reduced improving productivity and reducing cost.



### Outer Envelope

Sl. No.	Product Code	Tyre Size (Suggested)
1	46 x 22	13.00 R 22.5
2	44 x 19	12.00 R 24
3	44 x 22	385/65 R 22.5, 12.00 R 20
4	43 x 20	365/80 R 20
5	42 x 19	11.00 R 24, 12.00 R 22.5, 315/80 R 22.5, 11.00 R 20, 445/65 R 19.5
6	40 x 18	315/70 R 22.5, 295/80 R 22.5, 11.00 R 22.5, 10.00 R 20
7	40 x 19	275/80 R 22.5, 275/70 R 22.5, 10.00 R 22.5
8	38 x 20	295/60 R 22.5, 9.00 R 20, 8.25 R 20, 305/70 R 19.5, 445/45 R 19.5
9	35 x 16	7.50 R 20, 285/70 R 19.5
10	35 x 20	7.00 R 20, 6.50 R 20
11	32 x 16	265/70 R 19.5, 245/70 R 19.5, 235/70 R 19.5, 9.00 x 16, 8.25 x 16
12	31 x 18	225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5, 245/75 R 16, 7.50 x 16, 7.00 x 16, 7.50 x 15
13	28 x 16	205/65 R 17.5, 225/75 R 16, 215/75 R 16, 205/75 R 16, 7.00 x 15, 6.50 x 16, 6.00 x 16
14	26 x 16	5.90 x 15, 165 R 15, 6.00 x 14, 185 R 14
15	22 x 11	6.50 x 10
16	19 x 09	4.50 x 10
17	17 x 08	4.00 x 8



## DOUBLE ENVELOPE SYSTEM

ENVELOPES

midas




### Inner Envelope

Sl. No.	Product Code	Tyre Size (Suggested)
1	1100 x 480	15.00 R 22.5, 13.00 R 22.5, 12.00 R 22.5, 315/80 R 22.5, 315/75 R 22.5, 385/65 R 22.5, 305/70 R 22.5, 11.00 R 22, 12.00 R 20, 11.00 R 20, 425/55 R 19.5
2	1060 x 480	295/80 R 22.5, 275/80 R 22.5, 11.00 R 22.5, 10.00 R 20, 9.00 R 20
3	<b>780 x 400 (Coming soon)</b>	7.50 R 15, 7.00 R 16, 7.50 R 16, 8.25 R 16, 215/75 R 16, 225/75 R 16, 8 R 17.5, 8.5 R 17.5, 9 R 17.5, 205/75 R 17.5, 215/75 R 17.5, 235/75 R 17.5

### WICKING PAD

#### For Double Envelope System

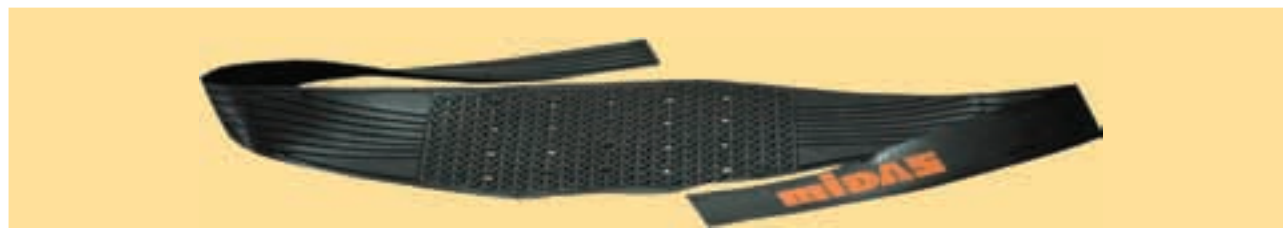

Sl. No.	Product Code	Tyre Size (Suggested)
1	1250 x 175	12.00 R 24, 11.00 R 24, 15.00 R 22.5, 13.00 R 22.5 12.00 R 22.5, 11.00 R 22.5, 315/80 R 22.5 315/75 R 22.5, 385/65 R 22.5, 305/70 R 22.5 295/80 R 22.5, 275/80 R 22.5, 12.00 R 20, 11.00 R 20 10.00 R 20, 9.00 R 20, 425/55 R 19.5

## ARC - RIMLESS SYSTEM



### Outer Envelope

Outer Envelope skirt length extends **2.0 inches** below the tyre bead on each side.

Sl. No.	Product Code	Tyre Size (Suggested)
1	46 x 15	12.00 R 24, 11.00 R 24, 13.00 R 22.5
2	44 x 16	12.00 R 22.5, 315/80 R 22.5, 11.00 R 20, 10.00 R 20
3	43 x 14	385/65 R 22.5, 12.00 R 20, 365/80 R 20, 445/45 R 19.5
4	43 x 17	315/70 R 22.5, 295/80 R 22.5
5	42 x 14	11.00 R 24.5, 11.00 R 22.5, 10.00 R 22.5
6	42 x 17	275/70 R 22.5, 295/60 R 22.5
7	40 x 13	275/80 R 22.5, 9.00 R 20
8	35 x 12	7.50 R 20, 7.00 R 20, 6.50 R 20,245/70 R 19.5, 235/70 R 19.5
9	34 x 12	265/70 R 22.5, 265/70 R 19.5

## SUPER PREMIUM CURING BAGS



Sl. No.	Sizes
1	16.9 x 28
2	14.9 x 28
3	13.6 x 28
4	12.4 x 28
5	14.00 x 24/25
6	12.00 x 24
7	12.00 R 22.5
8	11.00 R 22.5
9	315/80R22.5
10	295/80R22.5
11	12.00 x 20
12	11.00 x 20
13	10.00 x 20 (ELECTRIC)
14	10.00 x 20
15	9.00 x 20
16	8.25 x 20
17	8.25 x 16
18	7.50 x 16
19	7.00 x 15
20	6.00 x 16
21	6.00 x 14
22	5.90 x 15
23	5.65 x 12
24	4.50 x 12
25	4.50 x 10
26	4.00 x 8

## PREMIUM INNER TUBES



Sl. No.	Sizes
1	10.00 x 20
2	9.00 x 20
3	8.25 x 16
4	7.50 x 16

## SPECIAL HEAT RESISTANT FLAPS

These flaps are made with the same material as envelopes for heat resistance during retreading. Our flaps protect the curing tubes and increase their life.



Flap Size (Inches)	Tyre Size (Suggested)
22.5 <b>Extra Wide</b>	385/65 R 22.5, 315/80 R 22.5, 12.00 R 22.5
22.5	295/80 R 22.5, 11.00 R 22.5
20 <b>Extra Wide</b>	12.00 R 20, 11.00 R 20, 10.00 R 20, 12.00 x 20, 11.00 x 20
20 <b>SUPER</b>	10.00 x 20, 9.00 x 20, 8.25 x 20
16 <b>LCV</b>	8.25 x 16, 7.50 x 16, 7.00 x 16, 7.50 x 15, 7.00 x 15



**MIDAS TREADS INDIA PVT. LTD.**

Midas Marketing Building  
Varissery Junction, Mariathuruthu P.O.  
Kottayam - 686 017, Kerala, India.  
Phone: 91-481-2561215  
E-mail: sales@midastreads.com (Domestic Division)  
manoj@midastreads.com (Export Division)  
Website: [www.midas.co.in](http://www.midas.co.in)

**CUSTOMER CARE**

E-mail: [customercare@midastreads.com](mailto:customercare@midastreads.com)  
Sivaramakrishnan M. +91 9495686786  
Ramachandran K. +91 9495656151